

(12) UK Patent Application (19) GB (11) 2 346 478 (13) A

(43) Date of A Publication 09.08.2000

(21) Application No 0002753.2

(22) Date of Filing 07.02.2000

(30) Priority Data

(31) 09245503 (32) 05.02.1999 (33) US

(71) Applicant(s)

Agilent Technologies Inc
(Incorporated in USA - Delaware)
5301 Stevens Creek Boulevard MS 51 UPD,
Santa Clara CA 95052-8043, United States of America

(72) Inventor(s)

Carrie Carter-Coman
Fred A Kish Jr
Michael R. Krames
Paul S Martin

(74) Agent and/or Address for Service

Williams, Powell & Associates
4 St Paul's Churchyard, LONDON, EC4M 8AY,
United Kingdom

(51) INT CL⁷

H01L 33/00 // H01L 21/18 , H01S 5/10

(52) UK CL (Edition R)

H1K KEAX KELX K1EA K1EA1 K2R3A K2S1C K2S1D
K2S1E K2S16

(56) Documents Cited

GB 2307791 A EP 0860913 A US 5804834 A

(58) Field of Search

UK CL (Edition R) H1K KEAX KELF KELQ KELS KELX
KPXDB KPXMB
INT CL⁷ H01L 21/18 21/20 33/00 , H01S 5/10 5/187
ONLINE: WPI, EPODOC, JAPIO

(54) Abstract Title

Optical emission device

(57) An InAlGa_N light-emitting device, for example a VCSEL or an edge emitting laser, comprises; a host substrate 12, and an InAlGa_N light emitting structure 20. The device includes layers of a first and second polarity 20a, 20b, which are proximate to a top side of the host substrate. A first contact 22 is located at the top side of the InAlGa_N light-emitting structure. A wafer bonding layer 16, interposes the host substrate 12 and the InAlGa_N structure 20. A second device contact 18, positioned within or adjacent to the wafer bonding layer 16, is electrically connected to a bottom side of the InAlGa_N light emitting structure. The device may include first and second dielectric Bragg reflector mirrors 26a, 26b. The contacts may be made with at least 50% silver or 50% aluminium. The host substrate 12 may be made from silicon, germanium, glass, copper, or gallium arsenide. A second sapphire growth substrate (Figure 4A) may be used. In the fabrication of the device, metal bonding, substrate liftoff, and RIE device separation techniques may be employed. Ohmic contacts 24A, 24B may also be electrically connected to the host substrate.

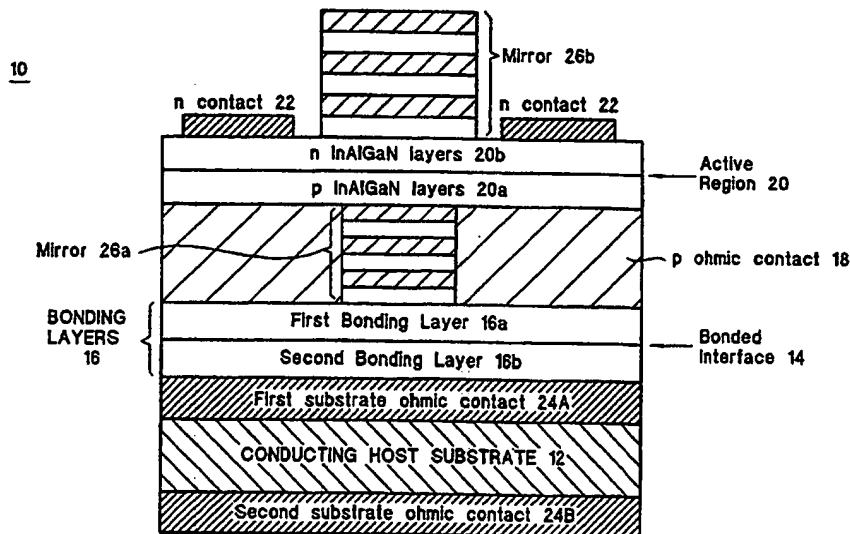


Figure 3

GB 2 346 478 A

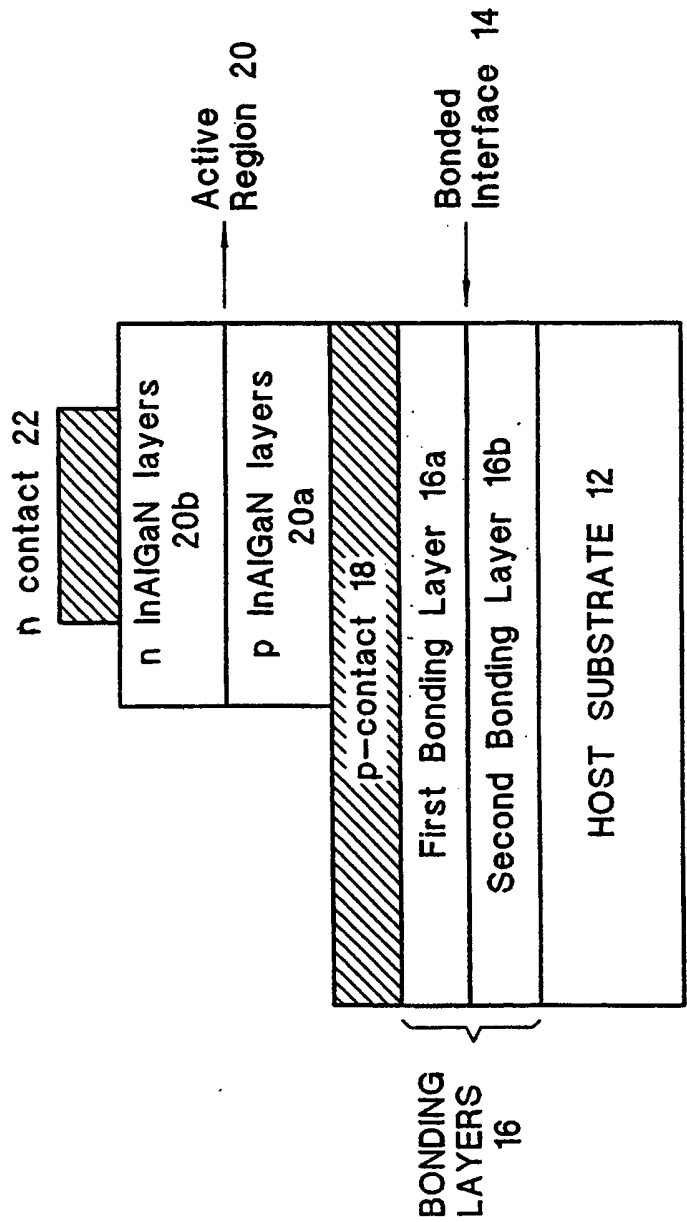
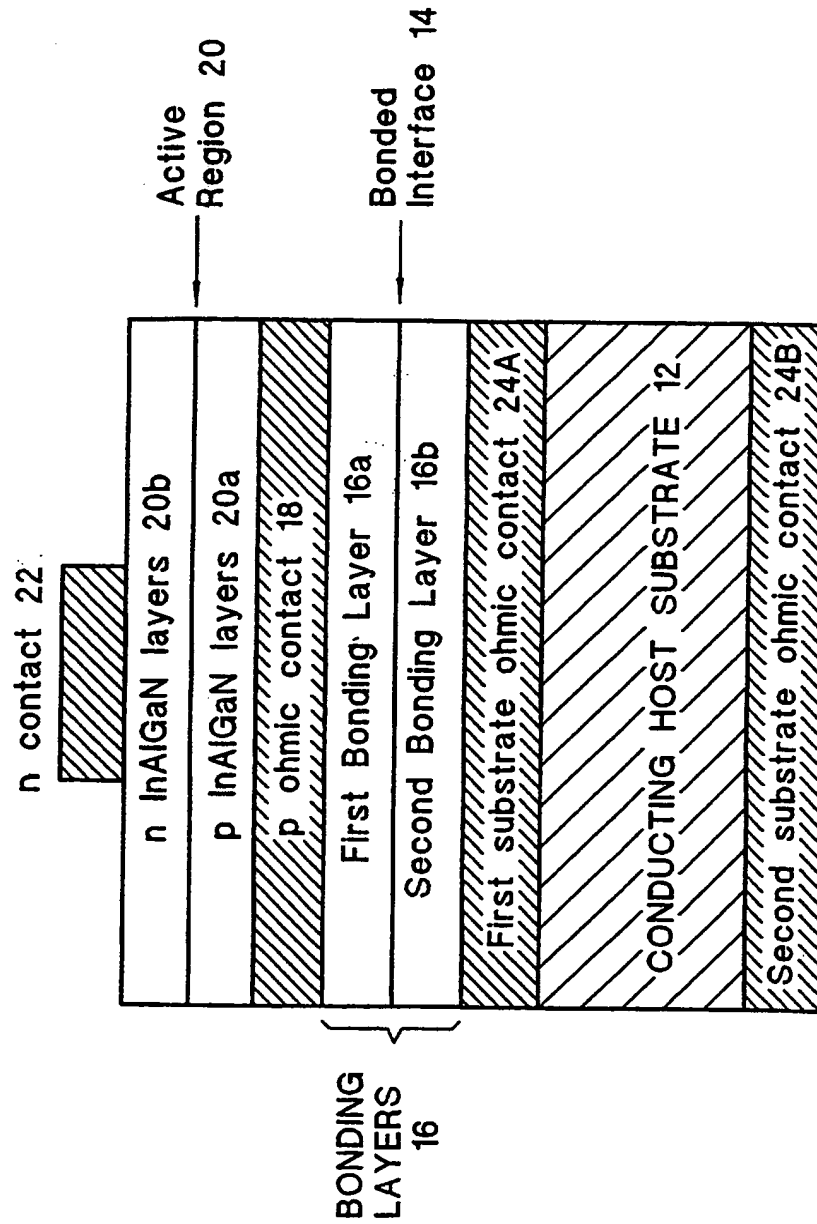


Figure 1

*Figure 2*

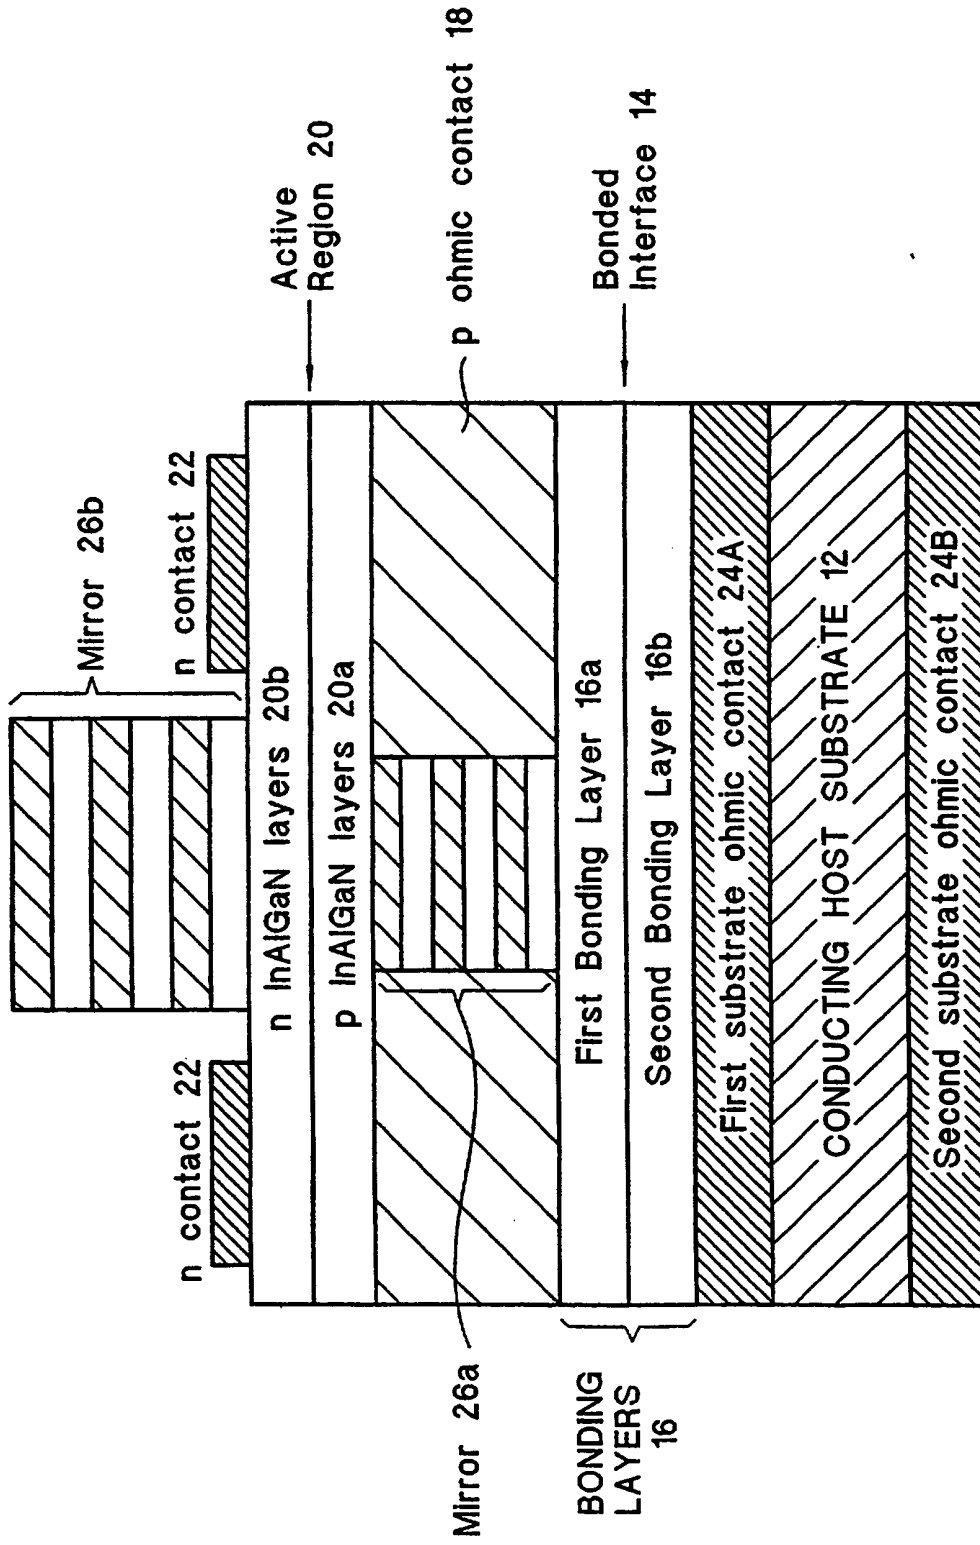
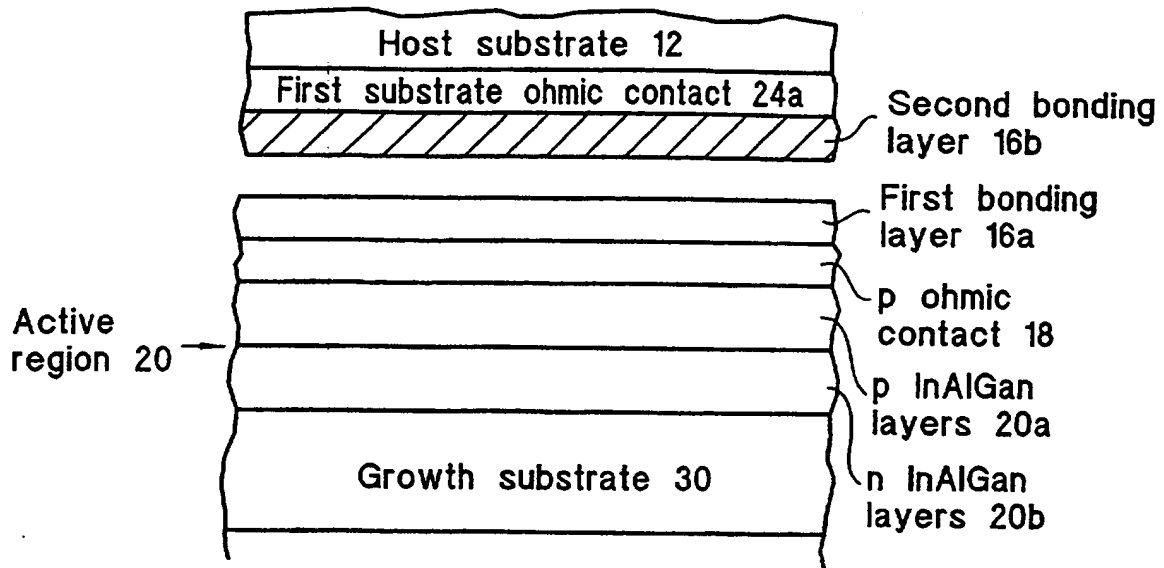
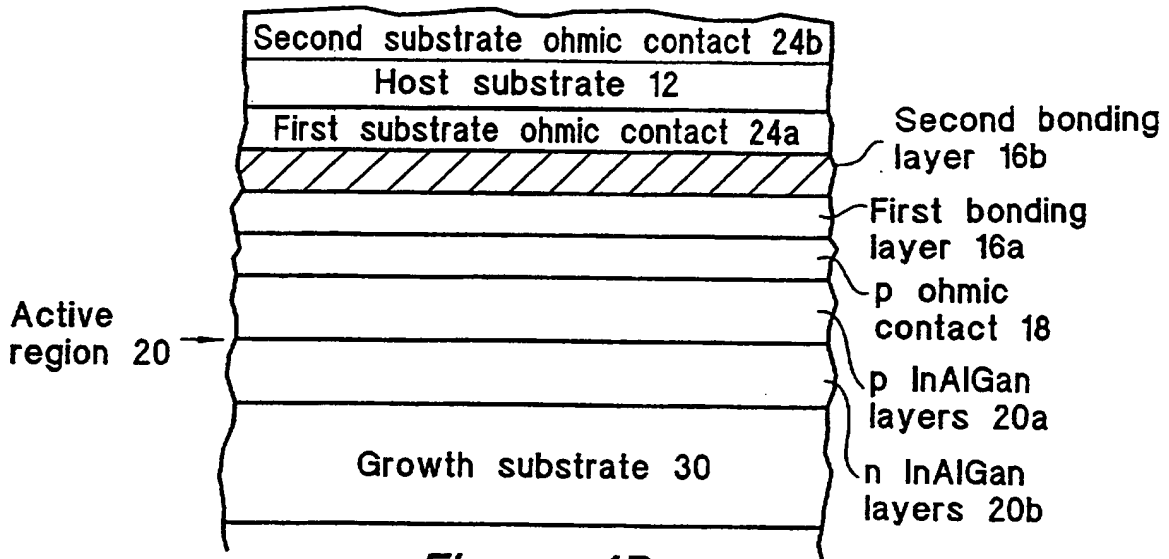
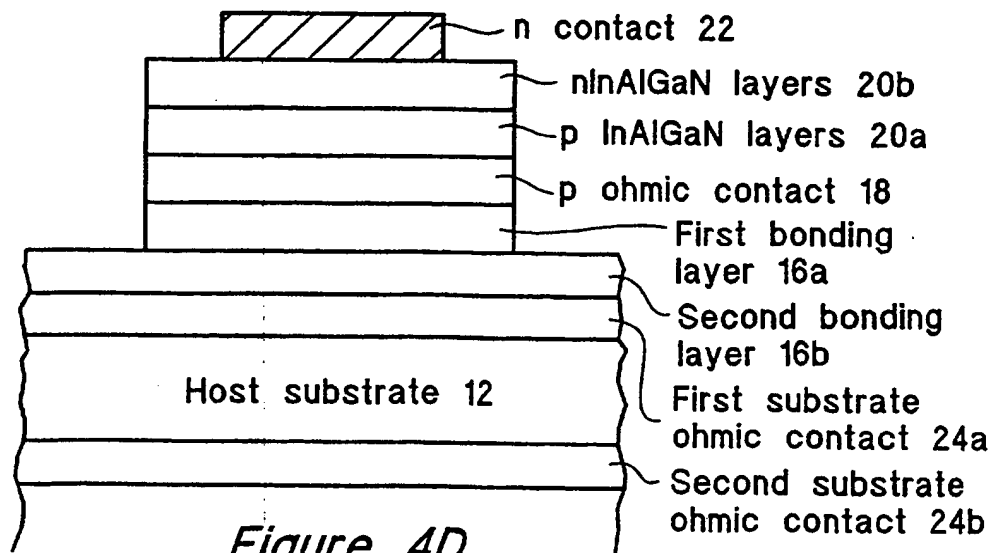


Figure 3

*Figure 4A**Figure 4B**Figure 4D*

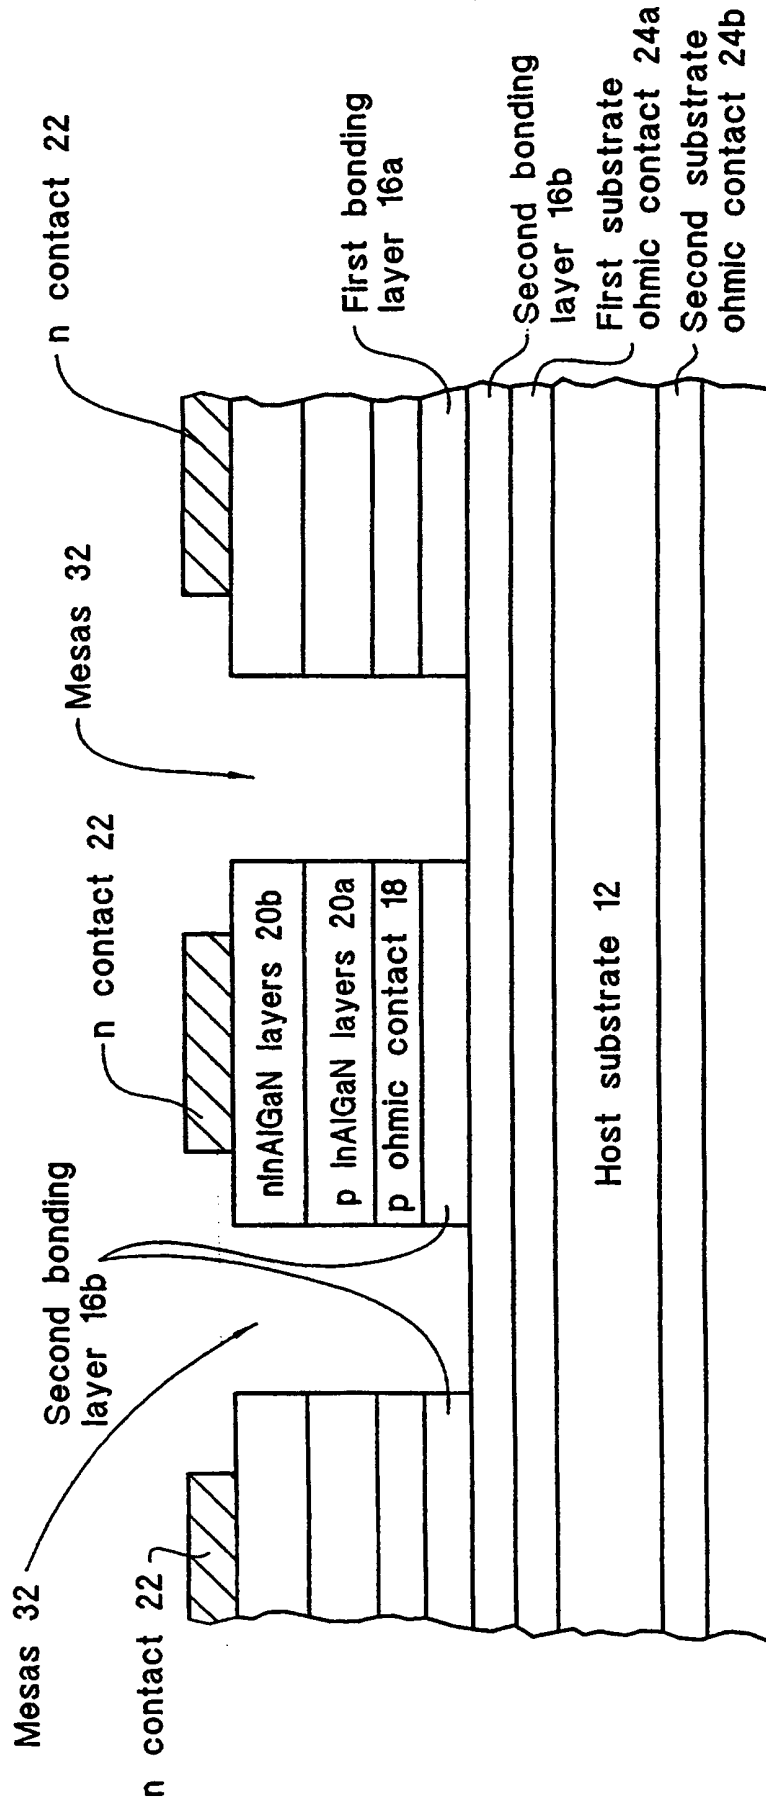


Figure 4C

OPTICAL EMISSION DEVICES

The present invention relates generally to the field of semiconductor optical emission devices, more particularly to a method for fabricating highly efficient and cost effective InAlGa_N devices, e.g. In_xAl_yGa_zN optical emitters fabricated via substrate removal.

Sapphire has proven to be the preferred substrate for growing high efficiency InAlGa_N light emitting devices because of its stability in the high temperature ammonia atmosphere of the epitaxial growth process. However, sapphire is an electrical insulator with poor thermal conductivity resulting in unusual and inefficient device designs. A typical LED structure grown on sapphire has two top side electrical contacts and a semitransparent metal layer to spread current over the p-contact. This contrasts with the standard vertical structure for current flow in LEDs grown on conducting substrates such as GaAs or GaP in which an electrical contact is on the top side of the semiconductor device and one is on the bottom. The two top side contacts on the sapphire based LED reduce the usable light emitting area of the device.

Furthermore, the low conductivity of the p-type InAlGa_N layer results in the need for a semitransparent metal layer to spread current over the p-type semiconducting layer. The index of refraction of the sapphire ($n \sim 1.7$) is also lower than that of the InAlGa_N layers ($n \sim 2.2-2.6$) grown upon it. Consequently, this mismatch in index of refraction (with the Sapphire being lower) results in waveguiding of the light between the absorbing semitransparent p-side current-spreading metallization and the sapphire. This results in absorption of 10-70% of the light generated in commercial InAlGa_N device by the semitransparent metal layer.

Wafer bonding can be divided into two basic categories: direct wafer bonding, and metallic wafer bonding. In direct wafer bonding, the two wafers are fused together

via mass transport at the bonding interface. Direct wafer bonding can be performed between any combination of semiconductor, oxide, and dielectric materials. It is usually done at high temperature ($>400^{\circ}\text{C}$) and under uniaxial pressure. One suitable direct wafer bonding technique is described by Kish, et al, in U.S.P.N. 5,502,316. In

5 metallic wafer bonding, a metallic layer is deposited between the two bonding substrates to cause them to adhere. This metallic layer may serve as an ohmic contact to either the active device, the substrate or both. One example of metallic bonding is flip-chip bonding, a technique used in the micro- and optoelectronics industry to attach a device upside down onto a substrate. Since flip-chip bonding is used to improve the
10 heat sinking of a device, removal of the substrate depends upon the device structure and conventionally the only requirements of the metallic bonding layer are that it be electrically conductive and mechanically robust.

A vertical cavity optoelectronic structure is defined to consist of an active region that is formed by light emitting layer interposing confining layers that may be doped,
15 un-doped, or contain a p-n junction. The structure also contains at least one reflective mirror that forms a Fabry-Perot cavity in the direction normal to the light emitting layers. Fabricating a vertical cavity optoelectronic structure in the $\text{GaN}/\text{In}_x\text{Al}_y\text{Ga}_z\text{N}/\text{Al}_x\text{Ga}_{1-x}\text{N}$ (where $x+y+z=0.5$) material systems poses challenges that set it apart from other III-V material systems. It is difficult to grow $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$
20 structures with high optical quality. Current spreading is a major concern for $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ devices. Lateral current spreading in the p-type material is ~ 30 times less than that in the n-type material. Furthermore, the low thermal conductivity of the substrates adds complexity to the device design, since the devices should be mounted p-side down for optimal heat sinking.

25 One vertical cavity optoelectronic structure, e.g. a vertical cavity surface emitting laser (VCSEL), requires high quality mirrors, e.g. 99.5% reflectivity. One method to achieve high quality mirrors is through semiconductor growth techniques. To reach the high reflectivity required of distributed Bragg reflectors (DBRs) suitable

for VCSELs (>99%), there are serious material issues for the growth of semiconductor $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ DBRs, including cracking and dopant incorporation. These mirrors require many periods/layers of alternating indium aluminum gallium nitride compositions ($\text{In}_x\text{Al}_y\text{Ga}_z\text{N}/\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$). Dielectric DBRs (D-DBR), in contrast to semiconductor DBRs, are relatively straightforward to make with reflectivities in excess of 99% in the spectral range spanned by the $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ system. These mirrors are typically deposited by evaporation or sputter techniques, but MBE (molecular beam epitaxial) and MOCVD (metal-organic chemical vapor deposition) can also be employed. However, only one side of the active region can be accessed for D-DBR deposition unless the host substrate is removed. Producing an $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ vertical cavity optoelectronic structure would be significantly easier if it was possible to bond and/or deposit D-DBRs on both sides of a $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ active region.

In "Low threshold, wafer fused long wavelength vertical cavity lasers", Applied Physics Letters, Vol. 64, No. 12, 1994, pp1463-1465, Dudley, et al. taught direct wafer bonding of AlAs/GaAs semiconductor DBRs to one side of a vertical cavity structure while in "Room-Temperature Continuous-Wave Operation of 1.430 μm Vertical-Cavity Lasers", IEEE Photonics Technology Letters, Vol. 7, No. 11, November 1995, Babic, et al. taught direct wafer bonded semiconductor DBRs to both sides of an InGaAsP VCSEL to use the large refractive index variations between AlAs/GaAs. As will be described, wafer bonding D-DBRs to $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ is significantly more complicated than semiconductor to semiconductor wafer bonding, and was not known previously in the art.

In "Dielectrically-Bonded Long Wavelength Vertical Cavity Laser on GaAs Substrates Using Strain-Compensated Multiple Quantum Wells", IEEE Photonics Technology Letters, Vol. 5, No. 12, December 1994, Chua et al. disclosed AlAs/GaAs semiconductor DBRs attached to an InGaAsP laser by means of a spin-on glass layer. Spin-on glass is not a suitable material for bonding in a VCSEL between the active layers and the DBR because it is difficult to control the precise thickness of spin on

glass, and hence the critical layer control needed for a VCSEL cavity is lost. Furthermore, the properties of the spin-on glass may be inhomogeneous, causing scattering and other losses in the cavity.

Optical mirror growth of $\text{Al}_x\text{Ga}_{1-x}\text{N}/\text{GaN}$ pairs of semiconductor DBR mirrors with reflectivities adequate for VCSELs, e.g. $> 99\%$, is difficult. Theoretical calculations of reflectivity suggest that to achieve the required high reflectivity, a high index contrast is required that can only be provided by increasing the Al composition of the low-index $\text{Al}_x\text{Ga}_{1-x}\text{N}$ layer and/or by including more layer periods (material properties taken from Ambacher et al., MRS Internet Journal of Nitride Semiconductor Research, 2(22) 1997). Either of these approaches introduces serious challenges. If current will be conducted through the DBR layers, it is important that the DBRs be conductive. To be sufficiently conductive, the $\text{Al}_x\text{Ga}_{1-x}\text{N}$ layer must be adequately doped. Dopant incorporation is insufficient unless the Al composition is reduced to below 50% for Si (n-type) doping and to below 17% for Mg (p-type) doping. However, the number of layer periods needed to achieve sufficient reflectivity using lower Al composition layers requires a large total thickness of $\text{Al}_x\text{Ga}_{1-x}\text{N}$ material, increasing the risk of epitaxial layer cracking and reducing compositional control. Indeed, the $\text{Al}_{30}\text{Ga}_{70}\text{N}/\text{GaN}$ stack of Figure 1 is already $\sim 2.5 \mu\text{m}$ thick and is far from sufficiently reflective for a VCSEL. Thus, a high reflectivity DBR based on this layer pair requires a total thickness significantly greater than $2.5 \mu\text{m}$ and would be difficult to grow reliably given the mismatch between AlN and GaN growth temperatures. Even though the cracking is not as great of an issue if the layers are undoped, compositional control and the AlN/GaN growth temperatures still pose great challenges to growing high reflectivity DBRs. Hence, even in applications where the DBRs do not have to conduct current, mirror stacks with reflectivities $>99\%$ in the $\text{In}_x\text{Al}_y\text{Ga}_z\text{N}$ material system have not been demonstrated. For this reason, dielectric-based DBR mirrors are preferred.

Semiconductor devices are manufactured many thousands to tens of thousands at a time on wafers. The wafers must be diced into individual die prior to packaging. If

sapphire is used as the growth substrate one must thin and dice the sapphire substrate. The hardness and hexagonal crystal structure of sapphire make the dicing operation difficult and expensive.

In this invention, devices and techniques for fabricating InAlGaN light-emitting devices are described that result from the removal of light-emitting layers from the sapphire growth substrate. In several embodiments, techniques for fabricating a vertical InAlGaN light-emitting diode structure that result in improved performance and or cost-effectiveness are described. Furthermore, metal bonding, substrate liftoff, and a novel RIE device separation technique are employed to efficiently produce vertical GaN LEDs or vertical cavity surface emitting lasers (VCSELs) on a substrate chosen for its thermal conductivity and ease of fabrication.

Figure 1 illustrates a preferred embodiment of an InAlGa_N light-emitting device with a bonding layer comprised of ohmic contact layers to the InAlGa_N heterostructure and adhesion layers to the host substrate.

5 Figure 2 illustrates a preferred embodiment of an InAlGa_N light-emitting device with a bonding layer comprised of ohmic contact layers to the InAlGa_N heterostructure and also ohmic contact layers to an electrically conducting host substrate.

10 Figure 3 illustrates a preferred embodiment of an InAlGa_N light-emitting device with opposing distributed Bragg reflector (DBR) mirror stacks on either side of the light emitting layers to form vertical cavity device. The bonding layer is comprised of ohmic contact layers to the InAlGa_N heterostructure and also ohmic contact layers to an electrically conducting host substrate.

15 Figures 4A-D illustrate a preferred method for dicing InAlGa_N light-emitting devices. In Figure 4A, InAlGa_N layers grown on a sapphire substrate are coated with ohmic contact and bonding layers. In Figure 4B, a host substrate is bonded to the InAlGa_N layers prior to removal of the sapphire substrate. In Figure 4C, the InAlGa_N devices are defined by mesa etching through the InAlGa_N device. In Figure 4D, Devices are finally singulated by dicing the host substrate.

This invention is concerned with building vertically conducting InAlGa_N light emitting devices defined as devices in which the ohmic contacts to the InAlGa_N device layers are on opposite sides, top & bottom, of the InAlGa_N device layers.

5 One preferred structure according to the present invention is shown in Figure 1. Initially, an InAlGa_N light emitting device 20 is grown on a sacrificial growth substrate 30 such as sapphire. The structure is grown with the p-type layer 20a exposed. A reflective ohmic contact 18 is deposited on top of the p-type InAlGa_N layers 20a. The InAlGa_N structure is then bonded to a host substrate 12 by means of bonding layers 16 interposing the
10 InAlGa_N light emitting layers 20 and the host substrate 12. The bonding layer 16 materials are chosen to provide a strong mechanical bond and to be electrically conductive. In general, the bonding layer includes a plurality of layers, the first bonding layer 16a that are deposited on the InAlGa_N device layers and the second bonding layers 16b that are deposited on the host substrate. The bonding layers 16 are deposited by any number of means known in the
15 prior art, such as electron-beam evaporation, sputtering, and electro-plating. After bonding, the sacrificial sapphire growth substrate 30 is removed via one of many substrate removal techniques as known in the prior art such as laser melting, mechanical polishing, and chemical etching of sacrificial layers. Then the InAlGa_N layers are patterned, etched, and contacted to provide for an electrical injection light emitting device. The bonding layer
20 serves as a low resistivity current spreading layer, an ohmic contact to the p-InAlGa_N layers, and an adhesion layer to the host substrate.

Another preferred embodiment is shown in Figure 2. As in Figure 1, InAlGa_N light-emitting device layers are grown atop a sacrificial substrate 30 and a reflective ohmic contact 18 is deposited on top of the exposed p-type layer 20a. Now, the InAlGa_N structure 20+18
25 is bonded to a host substrate 12 that is electrically conductive via bonding layers 16. This substrate may be a semiconductor, dielectric, or metal. In the case of a semiconductor substrate, the bonding layer must be adjacent or comprised of ohmic contact layers to the

substrate 24a, and a second ohmic contact is applied to the side of the substrate opposing the bonded interface 24b. After attaching the host substrate, the sacrificial growth substrate is removed and an n-type ohmic contact 22 is provided to the n-InAlGa_N layers. As a result, a vertically conductive InAlGa_N light-emitting device is achieved. This device exhibits

5 excellent current spreading due to the low resistivity of the semiconductor or metal host substrate resulting in low forward voltage and high electrical to optical conversion efficiency. In addition, because there is only a single ohmic contact on the top of the device and none of the active region of the device is removed during the fabrication of the second ohmic contact to the device, more than 75% of the available active region is preserved for
10 unblocked light emission compared to less than 40% in commercially available devices.

Another preferred embodiment is shown in Figure 3. In this case, a DBR mirror stack 26a is deposited to the p-InAlGa_N layer 20a in addition to the p-side ohmic contacts 18. The mirror stack can consist of one or more of the following materials: dielectric, semiconductor and metal. The structure is bonded to a host substrate 12 via bonding layers
15 16 which provides adhesion to the host substrate 12 and electrical contact to the p-side ohmic 18 contact metals. The bonding layer 16 material and thickness should be chosen to avoid compromising the DBR mirror stack reflectivity during the attachment of the host substrate. After removal of the sacrificial growth substrate 30, a second DBR mirror stack 26b is deposited on the InAlGa_N vertical cavity optoelectronic structure on the side opposing the
20 first mirror stack 26a. The optional second mirror stack 26b is patterned and etched to provide areas for n-type ohmic contacts 22. For a vertical cavity surface emitting laser, the mirrors must have very high reflectivity >99%. For a resonant cavity LED, the reflectivity requirement of the mirror(s) is relaxed (>60%). The first and second substrate ohmic contacts 24a, 24b provide for a vertically conductive device.

25 A preferred method for fabricating InAlGa_N light-emitting devices is shown in Figure 4. Figure 4a shows InAlGa_N light emitting layers 20a and 20b grown on a growth substrate 30 with a reflective ohmic silver contact 18 deposited on top of the p-type InAlGa_N layer. Silver is preferred for the p-type ohmic contact because of its high reflectivity to the

wavelengths of light typically emitted from an InAlGaN light-emitting device and for its low contact resistance to p-type InAlGaN. Alternatively, for devices in which the InAlGaN layers are grown with the n-type layer furthest from the sapphire growth substrate, aluminum is an excellent choice for an ohmic metal since it also has high reflectivity in the visible wavelength region of light typically emitted by InAlGaN devices and also makes an excellent ohmic contact to n-type InAlGaN. Above the device structure is shown a low resistivity host substrate 12 provided with first 24a and second 24b ohmic contacts to facilitate vertical conduction. A bonding layer 16b may be deposited on top of the first substrate ohmic contact. Another bonding layer 16a is optionally deposited on top of the p-side ohmic contact 18 to facilitate a mechanically strong metallic wafer bond in a later step. In Figure 4b, the host substrate is shown wafer bonded to the InAlGaN layers via the bonding layers. In Figure 4c, the growth substrate 30 has been removed and ohmic contact 22 to the n-InAlGaN layers is provided. Then, mesas 32 are etched through the InAlGaN layers to define individual device active areas. In Figure 4d, the host substrate has been diced to singulate individual InAlGaN light emitting devices. Silicon is preferred for the host substrate because it is easy to thin and saw into very small chips, and can have low electrical resistivity and high thermal conductivity compared to other common substrates. This method allows simple dicing of the InAlGaN devices and avoids the problems associating with dicing sapphire. It is also possible to etch mesas prior to attaching the host substrate, rather than after removal of the growth substrate.

The bonding layers 16a, 16b preferably constitute first and second ohmic metal layers respectively.

1. An InAlGa_N light-emitting device comprising:
a host substrate;
an AlInGa_N light-emitting structure, including device layers of a first and second polarity, proximate to a top side of the host substrate;
a first device contact to a top side of the AlInGa_N light-emitting structure;
a wafer bonding layer, interposing the host substrate and the AlInGa_N structure; and
a second device contact, positioned within or adjacent to the wafer bonding layer, electrically connected to a bottom side of the AlInGa_N light-emitting structure.
2. A device, as defined in claim 1, wherein the second device contact contains at least 50% silver.
3. A device, as defined in claim 1, wherein the second device contact contains at least 50% aluminum.
4. A device, as defined in claim 1, wherein the host substrate is selected from a group that includes metals and semiconductors.
5. A device, as defined in claim 4, wherein the host substrate is selected from a group that includes silicon, germanium, glass, copper, and gallium arsenide.
6. A device, as defined in claim 4, wherein the host substrate is a semiconductor, further comprising a first substrate ohmic contact positioned on the top side of the host substrate.
7. A device, as defined in claim 6, further comprising a second substrate ohmic contact that is electrically connected to a bottom side of the host substrate.

8. A device, as defined in claim 1, further comprising a pair of polished mirrors positioned on two opposing side faces of the InAlGa_N light-emitting structure forming an edge emitting laser.

9. A device, as defined in claim 1, further comprising:
a first dielectric Bragg reflector mirror, positioned on the top side of the InAlGa_N light-emitting structure; and
a second dielectric Bragg reflector mirror, positioned within the wafer bonding layer, adjacent to the bottom side of the InAlGa_N light emitting structure.

10. A method for fabricating a vertical conducting AlInGa_N light-emitting device comprising the steps of:

growing an AlInGa_N light-emitting structure that has device layers of a first and a second polarity on a growth substrate;

depositing a first ohmic metal layer onto an exposed side of the InAlGa_N light-emitting structure;

depositing a second ohmic metal layer onto a host substrate; and

wafer bonding the first and second ohmic metal layers to form a first electrical contact within the wafer bond interface.

11. A method, as defined in claim 10, wherein the first ohmic metal layer is selected from a group that includes silver, nickel, aluminum, gold, and cobalt.

12. A method, as defined in claim 10, further comprising the steps of:

removing the growth substrate; and

fabricating a second electrical contact to a newly exposed side of InAlGa_N light-emitting structure.

13. A method, as defined in claim 12, further comprising the step of etching mesas through the AlInGa_N light-emitting structure corresponding to a desired device size.

14. A method, as defined in claim 13, further comprising the step of singulating the host substrate.

15. A method, as defined in claim 10, wherein the step of growing an InAlGa_N light-emitting structure comprises the step of growing an AlInGa_N film having a thickness greater than 50 microns on the growth substrate.

16. A method, as defined in claim 10, wherein the host substrate is selected from a group that includes metals and semiconductors.

17. An AlInGa_N light-emitting device substantially as herein described with reference to each of the accompanying drawings.

18. A method of fabricating a AlInGa_N light-emitting device substantially as herein described with reference to each of the accompanying drawings.



INVESTOR IN PEOPLE

Application No: GB 0002753.2
Claims searched: ALL

Examiner: Claire Williams
Date of search: 12 May 2000

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK Cl (Ed.R): H1K (KEAX, KELF, KELQ, KELS, KELX, KPXDB, KPXMB)
Int Cl (Ed.7): H01L (21/18, 21/20, 33/00) H01S (5/10, 5/183, 5/187)
Other: ONLINE:WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
Y	GB 2307791 (HEWLETT-PACKARD) whole document	1, 4 - 6, 8, 9
Y	EP0860913 (MOTOROLA) whole document	1, 4 - 6, 8, 9
Y	US 5804834 (SHIMOYAMA) whole document	1, 4 - 6, 8, 9

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.
& Member of the same patent family

A Document indicating technological background and/or state of the art
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.